

Chatfield Clarke

Floor-to-Ceiling Tackboard Panels

Color Card

Chatfield Clarke Colors

Belair



Opal



Misty Grey



White Cap



Off-White



Beige



Snowbank

Group 1, Type 1, 15 oz

Harborweave



Pelican



Frosty



Grey Feather




Feather Down

Group 2, Type 1, 18 oz

Spellbound




Kasper

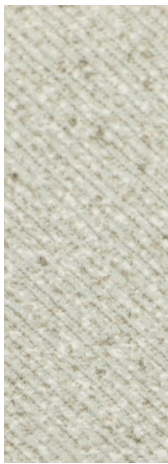

Sprite

Lacewing

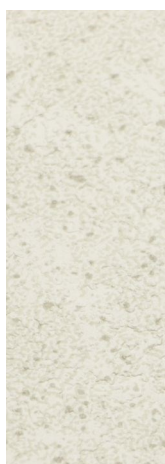


Ice



Oasis

Ceres

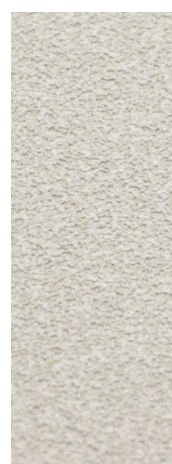

Flint



Sandstone

Group 2, Type 1, 15 oz

Koroseal School Collection

Insight




Linen 6323-15



Galaxy 6323-45



Illuminating 6323-90



Links 6323-75


Harborweave



Atrium 2123-00



Winter Mist 2123-14



Moonlight 2123-92



Sea Mist 2123-97


Authenticity




This Side of Paradise 2023-05



Treasure Island 2023-71



Wuthering Heights 2023-92



Picture of Dorian Grey 2023-72

Interloom



Luster NM23-07



Hazelwood NM23-12




Haze NM23-05



Nimbus NM23-10

Spellbound



Apollo 8823-02



Chant 8823-12



Destiny 8823-78



Delta 8823-71

Ramie



Mesh 8223-02



Spun 8223-03




Tangle 8223-07



Pivot 8223-12

Value Program Colors

Buechel

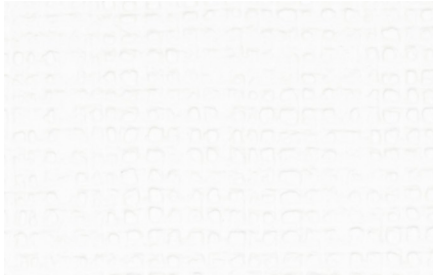


Pure White VPBC-03

Newburg



Sand Castle VPNB-04

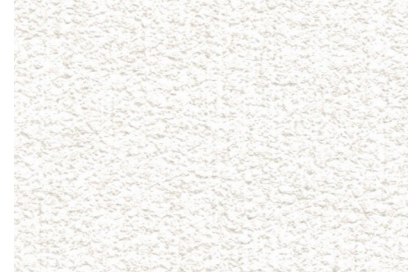

Swan VPNB-02

Crescent Hill



Lush VPCH-08



Alpaca VPCH-01



River Stone VPCH-04


Hurstbourne



Iconic Grey VPHB-07



Mink VPHB-01

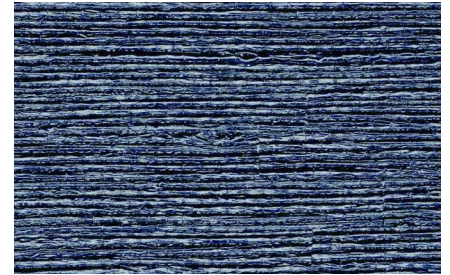

Inkwell VPHB-05

Strathmoor



Luna VPST-04



Whipped Cream VPST-07



Snow Caps VPST-05

Valley Station



Coconut VPVS-06



Barley VPVS-02







Sand Drift VPVS-04




Mushroom VPVS-07

Molding Options






Wood Moldings






Plastic Moldings



Also Available in 1"x1"



Aluminum Moldings



Tackboard Specifications

Koroseal®
Wallcoverings

3875 Embassy Parkway
 Fairlawn, Ohio 44333

54" Contract
Vinyl Wallcoverings

100% Water-Based Inks, Cadmium Free

	Group 1	Group 2
Physical Properties	U.S. Units	U.S. Units
Total Weight	15 oz. PLY	15 or 18 oz. PLY
	10 oz. PLY	10 or 12 oz. PLY
Roll Width	53/54"	53/54"
Thickness	.007"	.0085"
Fabric	Sheeting	Sheeting
Federal Specification	CCC-W-408A, Type I	CCC-W-408A, Type I
CFFA Specification	CFFA-W-101-D	CFFA-W-101-D
NFPA 101 Life Safety Code	Type I, Class A	Type I, Class A
	Meets Class A when tested on GRC Board	Meets Class A when tested on GRC Board



Larger Samples On Request

The Koroseal® brand wallcovering meets or exceeds all requirements of Federal Specifications CCC-W-408A and the CFFA Quality Standard For Vinyl Coated Fabric Wallcovering CFFA-W-101A, and the standard Classification of Wallcoverings by Durability Characteristics of ASTM F793-06 for the type and category classified including 24 hour cleanability tests based on ASTM method D1308.

Vinyl wall covering adhesive shall contain mildew inhibitors

Vinyl wallcovering shall be treated with antimicrobial to resist the growth of mildew and bacteria including staphylococcus aureus, streptovorticillum reticulum (pink stain), and mixed fungal spore such as aspergillus niger, aspergillus flavus, penicillium funiculosum and Chaetomium globosum.

Colorations

The colors selected for this product result from research with the design community on color needs and trends for coordination with the latest in carpeting, laminates, furniture, and contract fabrics.

This product contains the Koroseal® Early Warning Effect® Formulation.
 (Ask for the Early Warning Effect Information Bulletin for details.)

KOROKLEAR®

The flammability testing data, conclusions and recommendations in this report relate solely to measurements and descriptions of the properties of materials, products, or systems in response to heat and flame under controlled laboratory conditions and should not be considered or used for the description, appraisal, or regulations of the fire hazard of materials, products, or systems under actual fire condition.

Koroseal Wallcoverings, a division of RJF International Corporation

@RJF International Corporation © RJF International Corporation

Tackboard Specifications

Vinyl Tack Board Specification

Vinyl covered tackboard substrate shall be industrial insulation board 1/2" by full height and shall be manufactured specifically as a substrate for vinyl covered wall panels. The board shall be asphalt free, shall have an ironed-on coating, and have a density of 6 pounds per cubic foot. Edges are square without bevel (beveled available on request). The vinyl coatings shall be made of virgin vinyl calendared base color, weighing a minimum of 15 oz. per lineal yard. The coating shall be backed with sheeting or non-woven fabric. The vinyl wallcovering shall be mechanically laminated, with the long edges wrapped to the back of the tackboard. The panels will be applied over 1/2' Gypsum board or 3/8" plywood sheeting. The vinyl covered tackboard shall be a class II flame spread rating.

Reference brand: Chatfield Clarke (909) 823-4297

Care shall be taken in mounting the tackboard so that the texture of all panels will have the same orientation and color match.

Vinyl Tackboard Panels

Vinyl is machine laminated to a lightweight wood fiber panel 1/2" thick, and is wrapped around the long edges. Panel edges are normally square cut; beveled edges are available on special order. Total weight of panel is approximately 900 lbs. per 1000 sq. ft.

Colors shown are normally stocked. Other colors are available on special order.

Flame Resistant Industrial Insulation Board (FRIIB) - Available Upon Request

Class A fire rating, (15-50-90), on the coated side and tested in accordance with ASTM E84 under File R-4019.

Standard Sizes

48" x	84"	96"	102"	108"	120"	144"
	7'	8'	8.5'	9'	10'	12'

Test Result On Completed Panels

When tested in conformance with specifications set forth in ASTM Designation E-84, vinyl covered tackboards yielded the following results:

Flame Spread 65

Smoke Density..... 175-350*

*The numerical results shown relate solely to measurement in response to heat and flame under controlled laboratory conditions and should not be considered or used to reflex hazards presented by this or any other material under actual conditions.

Attention: As a result of environmental conditions, all boards are subject to expansion and/or contraction due to the nature of the product. A divider bar is recommended between all panels. If not used, Chatfield Clarke will not be responsible for any buckling or gaps due to expansion and/or contraction of the panels.. **ALL PRODUCT IS MADE TO ORDER, THEREFORE, ALL SALES ARE FINAL.**